695,704



CL

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:

A61M 35/00

A1

(11) International Publication Number: WO 92/19313

(43) International Publication Date: 12 November 1992 (12.11.92)

US

(21) International Application Number: PCT/US92/03498

(22) International Filing Date: 28 April 1992 (28.04.92)

(30) Priority data:

(71) Applicant: MEDCHEM PRODUCTS, INC. [US/US]; 232 West Cummings Park, Woburn, MA 01801 (US).

3 May 1991 (03.05.91)

(72) Inventors: FERDMAN, Ariel; 12 Hillside Avenue, Melrose, MA 02176 (US). KUO, Jing-wen; 23 Spencer Road, #367, Boxboro, MA 01719 (US). MILLER, David; 9 Francis Street, Brookline, MA 02146 (US). PINSKY, Vladimir; 10 Lake Shore Terrace, Apt. #4, Brighton, MA 02135 (US). RICHARDS, William, Dana; 167 Holliston Street, Medway, MA 02053 (US). SWANN, David; 950 Massachusetts Avenue, Unit 706, Cambridge, MA 02139 (US).

(74) Agents: BOSHAR, Mark, F. et al.; Hale and Dorr, 60 State Street, Boston, MA 02109 (US).

(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GB (European patent), GR (European patent), HU, IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), NO, SE (European patent).


Published

With international search report.

Before the expiration of the time limit for amending the

claims and to be republished in the event of the receipt of amendments.

(54) Tide: METHOD AND DEVICE FOR WOUND CLOSURE

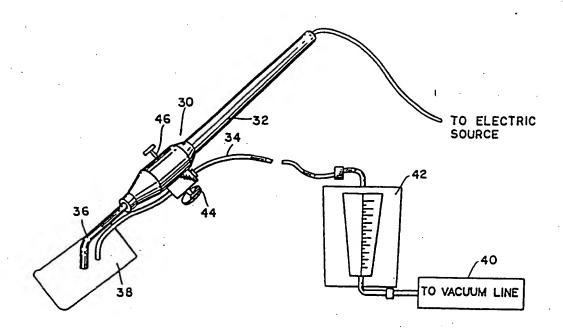

(57) Abstract

A method of treating a wound site wherein a porous, adhesive backed dressing (20) is utilized. A vacuum and/or heat (30) is applied to the wound site through the dressing so as to draw the tissue adjacent the wound site to the dressing so as to minimize trauma to the wound and increase the adherence of the adhesive.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCI on the front pages of pamphlets publishing international applications under the PCT.

ΑT	Austria	FI	i-inlaid-	ML	Malı
		FR	France	· MN	Mongoliz
AU	Austrālia		(autus	MR	Mauritania
88	Harbados	GA		MW	Malawi
BE	Belgium	GB	United Kingdom	NL.	Netherlands
8F	Burking hoo	GN	<i>Guinea</i>		Norway
8G	Bulgaria	GR	Cirecce	NO	•
	Benin	HU	Hungary	PĹ	Poland
BJ		IE	Ircland	RO	Romania
KR	Brazil			RU	Russian Federation
CA	('anada	IT	Italy	SD	كسلعم
CF	Central African Republic	16	Japan	SE	Sweden
က	Congo	KP	Democratic People's Republic		Senegal
CH.	Switzerland		of Kores	SN	
		KK	Republic of Korea	SU	Soviet Union
CI	Côte d'Ivoire	ü	(lexistenstein	TD	(Tud
CM	(,Ametong		•	TC	Tugo
C.	('Jechusknakia	LK	Sri Lunta	us	United States of America
DE	Cicroway	LU	[mrcmpont]	UJ	China Carata
DK	Denmark	MC	Monaco		
UK	tycomes a	MC	Madagastat		•

10

15

20

25

METHOD AND DEVICE FOR WOUND CLOSURE Background of the Invention

The present invention related to wound closures and in particular to an improved adhesive wound closure and method for applying the same.

In order to promote the healing of flesh wounds in humans and animals it is desireable to bring the severed surfaces of the wound into close contact with each other. Heretofore adhesive backed tapes such as the so-called "butterfly" bandages have been available as wound closures. Such devices, however, have two major problems associated with their use. The first problem arises from the difficulty in securing the adhesive to the tissue adjacent a wound without aggravating the wound since such dressings require that a pressure be applied to the dressing and hence to the wound. However, this is somewhat self defeating since applying a pressure to the tissue adjacent the wound tends to further separate the severed surfaces rather than draw them together. The second problem arises from the difficulty in obtaining a good adhesive bond between the dressing and the areas surrounding a wound as a result of the moist environment caused by the fluids excreted at the wound site.

10

15

20

25

Due to the existence of the above problems suturing has remained the preferred procedure for deep wound treatment notwithstanding the relative ease of using adhesive backed dressings in comparison to suturing.

Summary of the Invention

In view of the above, it is the principle object of the present invention to provide an improved method for the treatment of wounds which enables the use of adhesive backed dressings while overcoming the problems associated with the use of such dressings as discussed above.

A further object is to provide a method of improving the flow characteristics of the adhesive of a dressing so as to minimize the contact force needed to obtain a good bond between the dressing and tissue.

A still further object is to provide a device which may be used in connection with the use of adhesive backed dressings in the treatment of wounds in accordance with the method of the present invention.

In accordance with the present invention a porous wound dressing provided with an adhesive backing is utilized. The contact side of the dressing is applied to the wound site and is heated

10

improving the flow characteristics of the adhesive while drawing the tissue adjacent the wound site into contact with the adhesive. By drawing the tissue into contact with the dressing rather than pressing the dressing onto the wound the tissue adjacent the wound site is brought more closely to its natural state rather than being further separated as would be the case if the dressing were pressed against the wound site. Applying heat to the dressing also tends to drive moisture from the wound site to thereby improve the adherence of the dressing to the tissue at the wound site.

Brief Description of the Drawings

15 In the accompanying drawings:

Fig. 1 is a simplified diagrammatic view of the effect on tissue adjacent a wound site of applying an adhesive backed dressing in accordance with prior art methodology.

Fig. 2 is a view similar to Fig. 1 illustrating the effect of the method of the present invention on the tissue adjacent a wound site.

Fig. 3 is a simplified view of a device which may be utilized in practicing the method of the present invention.

Detailed Description of the Preferred Embodiment

In the typical application of a dressing 10 to a wound 12 a downward force is applied to the dressing so as to cause a bonding between the adhesive 14 on the back of the dressing and the tissue 16 adjacent the wound. As shown in Fig. 1 a result of the downward force applied at the wound site is that the tissue adjacent the wound site flexes downwardly and actually widens the wound gap by separating the tissue further.

In accordance with a first aspect of the present invention a porous adhesive dressing 20 is utilized. The dressing 20 is lightly applied over the wound site and a vacuum is applied to the tissue adjacent the wound gap through the dressing thereby sucking 15 the nonporous tissue adjacent the wound site into close contact and in bonding contact with the adhesive 22 as shown in Fig. 2. As a result of the wound tissue being brought into close contact the healing process is enhanced. 20 To enable the vacuum to be applied through the dressing, the dressing must be porous. Such a porous dressing is disclosed, for example, in U.S. Patent 4,759,354. One such porous dressing is available commercially

10

15

20

25

from the 3M Corporation under the tradename "TRANSPORE."

As the tissue is sucked up against the dressing the dressing is preferably heated to between 40°C and 80°C. This has two effects: firstly the application of heat to the dressing decreases the viscosity of the adhesive backing and thereby causes the adhesive to flow more uniformly and possibly into regions where it would not otherwise flow to improve the bonding with the tissue adjacent the wound. In addition, heating the dressing tends to dry the wound site and thereby improves the bonding between dressing and the tissue. A further benefit of applying heat is derived from the generally soothing effect that the additional warmth has on a possibly traumatized patient.

In a successful test of the invention a 2.6mm x 4.0mm strip of TRANSPORE tape was applied to a section of skin and subjected to a vacuum which when open had a negative air flow of 1 SCFM (standard cubic foot per minute) and heated through a range of temperatures. Optimum results were obtained when the dressing was heated to a temperature of 55° C. When the heat and vacuum were both applied to the dressing the force of adherence was increased by a factor of approximately 2.4 as compared with no heat

10

15

or vacuum being applied. When only a vacuum was applied to the dressing the adherence was increased by a factor of approximately 1.6. When only heat was applied the adherence appeared to increase with temperature but leveled off at 80°C with an increased adherence factor of 2.3. At 55°C the adherence increased by a factor of 1.8.

Reference is now made to Fig. 3 wherein a device is depicted with which the present invention may be practiced. The device 30 includes a grip 32 supporting both a suction line 34 and a heating rod 36. The heating rod terminates in a plate 38 through which the suction line 34 passes. The suction line is connected to a vacuum pump 40 through a flow meter 42 and control valve 44. Similarly a control element 46, in the form of a rheostat or the like, is provided to control the temperature attained by the heating element 36.

In use the porous dressing is applied over the

wound and thereafter the device 30 is slightly

passed over the dressing without bearing down on the

dressing. The effect of the vacuum is to draw the

tissue to the adhesive backing of the dressing

rather than the reverse. The applied heat in

addition to assisting in the drying of fluids at the

wound site and improving the adhesive

characteristics of the adhesive backing has been reported as having a soothing effect thereby possibly minimizing trauma to the patient.

Thus, in accordance with the above, the 5 aforementioned objectives may effectively be attained.

What is claimed is:

1. A method of treating a wound comprising the steps of:

applying a porous, adhesive backed dressing to 5 a wound site; and

applying a vacuum to said wound site through said porous dressing to draw the tissue adjacent the wound into bonding contact with said adhesive without depressing said dressing into the wound.

- 2. The method in accordance with claim 1 wherein, the step of vacuum application further includes generating said vacuum with a vacuum line which when open has a negative air flow of approximately 1 standard cubic foot per minute or greater.
- 15 3. The method in accordance with claim 1 comprising the further step of applying heat to said dressing to cause said adhesive to flow and to drive moisture from the wound site, and thereby improve bonding contact between said dressing and the tissue without 20 depressing said dressing into the wound.
 - 4. The method in accordance with claim 1 wherein said wound is a flesh wound.
- 5. The method in accordance with claim 3 wherein said step of heat application further includes heating 25 said dressing to between 40°C and 80°C.
 - 6. The method in accordance with claim 3 wherein said step of vacuum application is performed simultaneously with said step of heat application.

20

25

- 7. The method in accordance with claim 5 wherein said step of vacuum application is performed simultaneously with said step of heat application.
- 8. A method of treating a wound comprising the 5 steps of:

applying a porous, adhesive backed dressing to a wound site; and

applying heat to said dressing to cause said adhesive to flow and to drive moisture from the wound site, and thereby improve bonding contact between said dressing and the tissue without depressing said dressing into the wound.

- 9. The method in accordance with claim 8 wherein said wound is a flesh wound.
- 15 · 10. The method in accordance with claim 8 wherein said step of heat application further includes heating said dressing to be between 40°C and 80°C.
 - 11. A device for use with a porous, adhesive backed dressing for treating a wound site, said device including:

vacuum means for applying suction to said wound site through said porous dressing to draw the tissue adjacent the wound site into bonding contact with said adhesive without depressing said dressings into the wound: and


a grip for supporting said vacuum means.

12. The device in accordance with claim 11 further comprising a plate affixed to said grip means, and said vacuum means passing through said plate.

- 13. The device in accordance with claim 12 further comprising means for heating said plate so that heat is applied to the dressing to cause said adhesive to flow and to drive moisture from the wound site, and thereby improve bonding contact between said dressing and the tissue without depressing said dressing into the wound.
 - 14. A device for use with an adhesive backed porous dressing for treating a wound site, said device including:

10 a grip;

a plate affixed to said grip; and
means for heating said plate so that heat is
applied to the dressing to cause said adhesive to flow
and to drive moisture from the wound site, and thereby
improve bonding contact between said dressing and the
tissue.

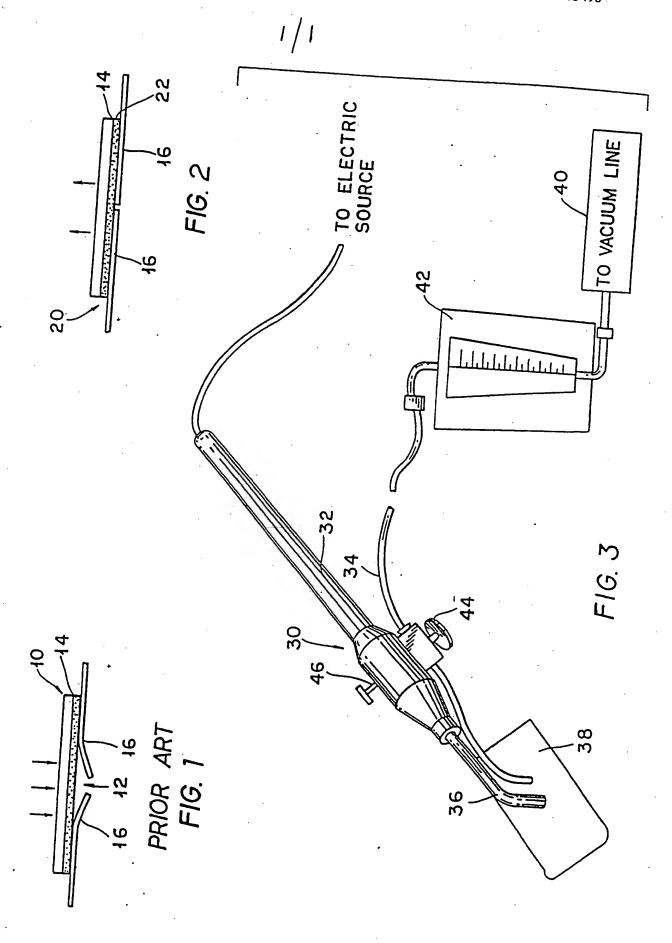

IPC(5) :A61M 35/00								
According	to International Patent Classification (IPC) or to bo	th national classification and IPC						
B. FIELDS SEARCHED								
Minimum documentation searched (classification system followed by classification symbols)								
U.S.: Please See Extra Sheet.								
Documents	ation scarched other than minimum documentation to	the extent that such documents are included	d in the fields searched					
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)								
	· · · · · · · · · · · · · · · · · · ·							
C. DOC	CUMENTS CONSIDERED TO BE RELEVANT							
Category*	Citation of document, with indication, where	appropriate, of the relevant passages	Relevant to claim No.					
A	US,A, 4,969,880 (ZAMIEROWSKI) 13 November	er 1990 See Figure 6	1-14					
A	US,A, 4,540,412 (VANOVERLOOP) 10 Septemb	1-14						
•								
	,	·						
			·					
		ı						
		,						
		,						
Furthe	er documents are listed in the continuation of Box (See patent family annex.						
'A' doca	cial categories of cited documents: nument defining the general state of the art which is not considered	T later document published after the inte- date and not in conflict with the applica principle or theory underlying the inve	tion but cited to understand the					
E certi	e part of particular relevance ier document published on or after the international filing date	"X" document of particular relevance; the	: claimed invention cannot be					
cited	ament which may throw doubts on priority claim(s) or which is I to establish the publication date of another citation or other ial remon (as specified)	"Y" document of particular relevance; the	elaimed invention cannot be					
DOU	ament referring to an oral disclosure, use, exhibition or other	considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art						
the p	ament published prior to the international filing date but later than priority date claimed	*&* document member of the same patent family						
Date of the a	ctual completion of the international search	Date of mailing of the international sea	rch report					
lame and ma	siling address of the ISA/	28 SEP 1992	60/					
	er of Patents and Trademarks	K.M. REICHLE	your !					
	. NOT APPLICABLE	Telephone No. (703) 308-0858	/					

B. FIELDS SEARCHED
Minimum documentation searched
Classification System: U.S.

604/290 604: 289-291, 304-305, 307, 313, 315, 316, 902 128: 89.1, 155, 399, 400, 82, 82.1, 851, 390 606: 213, 215, 216, 27; 138, 148, 149